


# DIY Narrow Hallway Table

Addicted2DIY.com

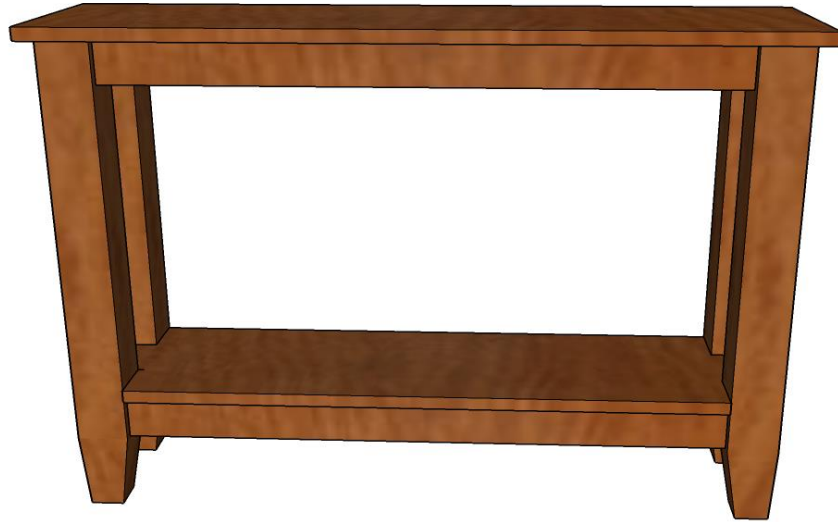

**\*Before beginning this project, please read through all of the plans and the blog post. When building this project, be sure to measure your wood and cut to fit. The measurements listed are all approximates as wood dimensions can vary depending on the type of wood used and the dryness of the wood.**

## **Materials List:**

- 1 – 1x12" board @ 8' long
- 2 – 1x3" board @ 8' long
- 4 – [House of Wood Table Legs from Osborne Wood](#)
- 1 ¼" pocket screws
- Wood glue
- Kreg Jig
- Drill
- Table Saw
- Orbital Sander
- Miter Saw

## **Cut List:**

- 1 – 1x12" @ 44"
- 1 – 1x12" @ 42", ripped down to 10" wide, 3" cut out of each corner to fit between legs
- 4 – 1x3 @ 36"
- 4 – 1x3 @ 4"

## **Step 1:**




For each end, drill pocket holes into the 4" side pieces. Attach the bottom piece 5" from the bottom of the legs and 1/2" in. Attach the top piece flush with the top, also 1/2" in. Use 1 1/4" pocket screws and wood glue to attach the pieces.

## **Step 2:**



Drill pocket holes into each of the 36" pieces, two into each end and three going up. Attach the bottom stretchers 5" from the bottom of the legs. Attach the top stretchers flush with the tops of the legs. All of these are inset 1/2"

## **Step 3:**

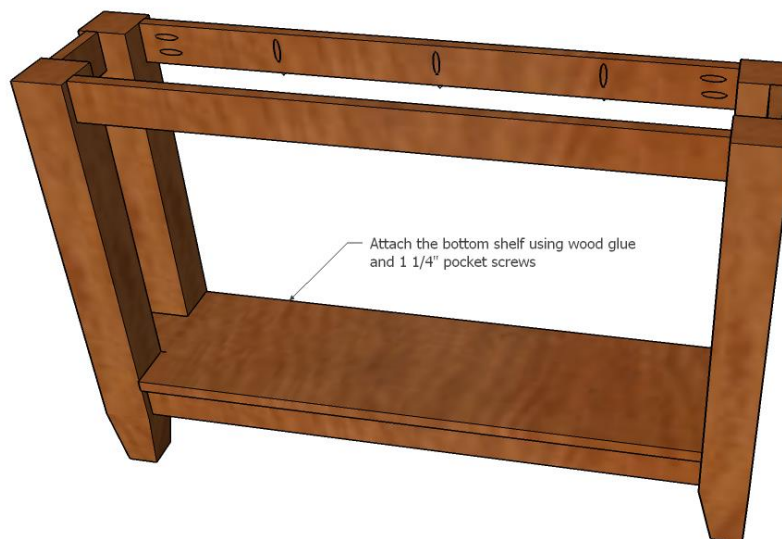

Rip the bottom 1x12 shelf down to 10" wide. Cut 3" out of each corner to allow it to fit between the legs. Attach the shelf using 1 1/4" pocket screws and wood glue.

## **Step 4:**



Attach the top shelf with 1 1/4" pocket screws and wood glue. There should be a 1" gap on each side and a 1/2" gap on the front and back (measuring from the legs).

## **Dimensions:**

